


Castore floor 35



IP20     

Dimmerable: +  -

TECHNICAL DRAWINGS

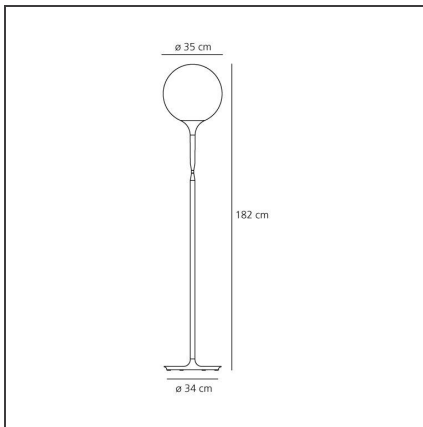

DESIGN BY

Michele De Lucchi, Huub Ubbens

DESCRIPTION

The spherical diffuser design is enhanced by a removable-fitting and tapering luminous stem, making a gentle transition from the strong diffuser light to the blind lamp structure area. Base in zamac; stem in thermoplastic resin; blown glass diffuser.

FEATURES

| | | | |
|----------------------|----------|-----------------------|-----------------------------------|
| Article Code: | 1055010A | Material: | Blown glass, polycarbonate, zamak |
| Colour: | White | Series: | Design |
| Installation: | Floor | Area contract: | Hospitality, Retail, Residential |
| Environment: | Indoor | Emission: | Diffused |

DIMENSIONS

| | | | |
|-----------------------|--------|------------------------|-----|
| Height: | cm 182 | Glow Wire Test: | 750 |
| Base Diameter: | cm 34 | | |

NOT INCLUDED SOURCES

| | | | |
|----------------------|-------|-------------------------------|-------|
| Category: | HALO | Color Rendering: | 1a |
| Number: | 1 | Color temperature (K): | 2900K |
| Watt: | 150W | | |
| Lbs: | Qt32 | | |
| Socket: | E27 | | |
| Duration (h): | 2000h | | |

ALTERNATIVE SOURCES

| | |
|--------------------------------------|--------|
| Category: | LED |
| Number: | 1 |
| Watt: | 21W |
| Delivered lumens output (lm): | 2452lm |
| Type: | 2 |
| Socket: | E27 |
| Class: | A |

LUMINAIRE

| | | | |
|-----------------|-----------|--------------------------------------|--------------|
| Watt: | 150W | Delivered lumens output (lm): | 2431lm |
| Voltage: | 220V-240V | CCT: | 3000K |
| | | Efficiency: | 85% |
| | | Efficacy: | 16lm/W |
| | | CRI: | 99 |
| | | Dimmer Typology: | Touch Dimmer |

Notes

A touch dimmer button on the stem for the storage of the light intensity set-up or the use of a local or remote control. Available in two sizes.