
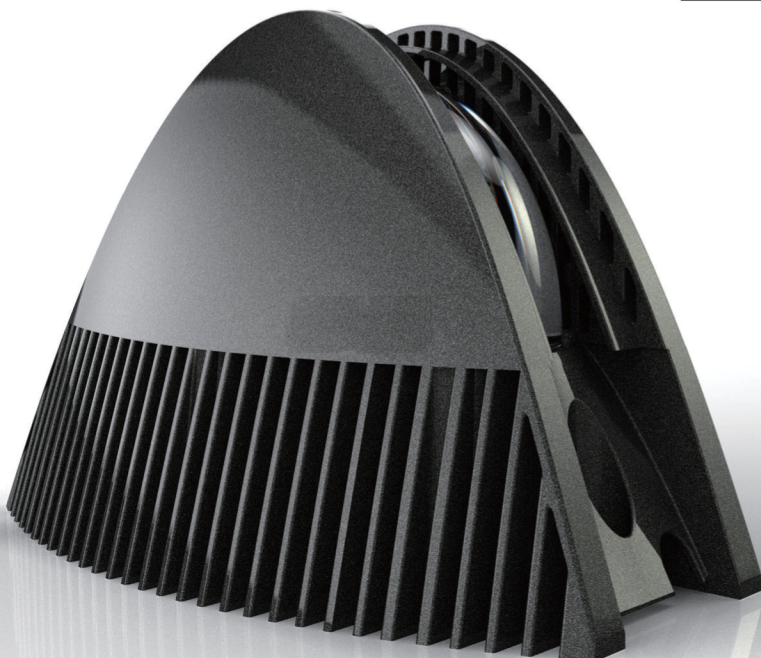
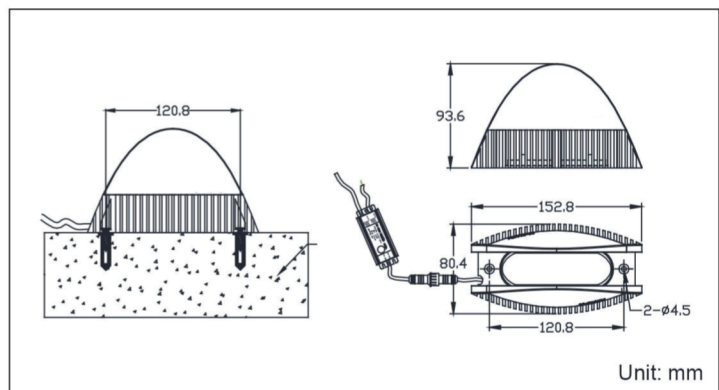


GALWAY Application

Clear cut-off line of lighting ,splitting buildings outline, used for indoor lighting, outdoor lighting, hotel aisles, windows, corridors and other frame lighting, RGB,RGBW gradually dimming are all available, can be synchronized with music, waterproof grade IP66.

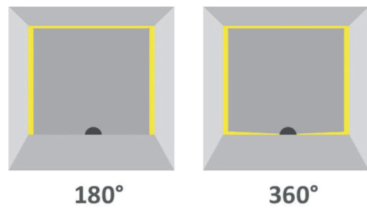

Material

Die cast aluminum shell, surface coating colors: black ■ white □
Surface-mount, optical glass lens
Internal / external driver

Performance parameters

Color temperature:	Warm white 3000K, Cool white 5000K	Red ■ Green ■ Blue ■	RGB	Dimmable
Light Source:	CREE:XP-G2	LUXEON:L1C1	LUXEON:L1C1	CREE:XP-G2
Power:	8W/15W	6W	9W	8W
Driver:	Meanwell	Meanwell	Meanwell	Meanwell
Input Voltage:	DC24V/AC220V	DC24V/AC220V	DC24V	DC24V
Control Mode:	Switch	Switch	DMX512	DMX512
IP Rating:	IP66	IP66	IP66	IP66
Working temperature:	-40~50°C	-40~50°C	-40~50°C	-40~50°C
Warrenty:	2years/ 20000 hours lifespan, maintaining freely forever except LED chip and driver.			

