
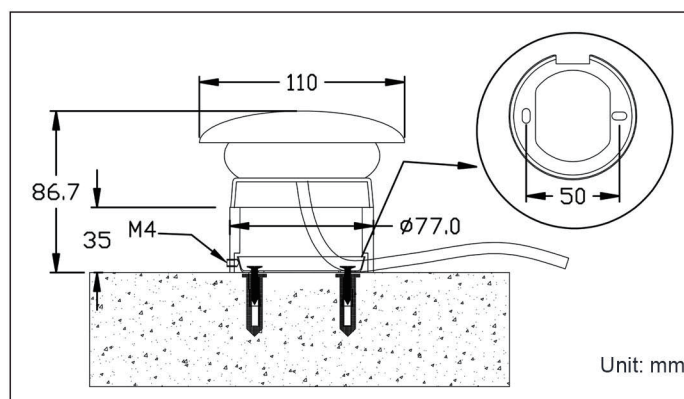
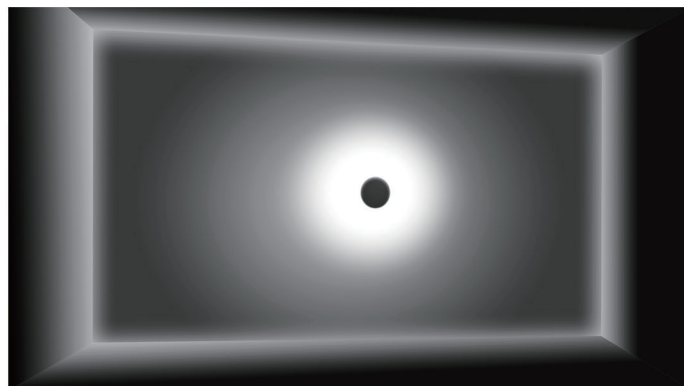


## KILDARE Application

Combination of point and line, completion of surface lighting, both lighting efficiency, but also decorative efficiency. Suitable for indoor and outdoor wall lighting, balconies, exterior walls, corridors, courtyard views, landmarks and so on. Existing RGB, gradually dimming, can interact with music, used for ceilings, replacing light strips.

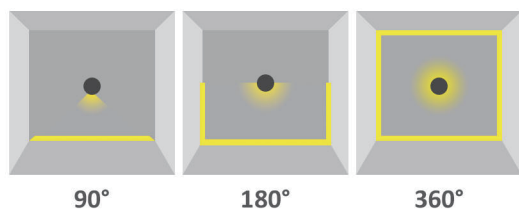

## Material

Die cast aluminum shell, cold forging heating sink, surface spraying, color: white ☐  
 Recessed, optical glass lens  
 External driver

## Performance parameters

Color temperature:	Warm white 3000K, Cool white 5000K	Red <span style="color: red;">■</span> Green <span style="color: green;">■</span> Blue <span style="color: blue;">■</span>	RGB	Dimmable
Light Source:	CREE:XP-G2	LUXEON:L1CI	LUXEON:L1CI	CREE:XP-G2
Power:	6W	6W	18W	6W
Driver:	Meanwell	Meanwell	Meanwell	Meanwell
Input Voltage:	DC24V/AC220V	DC24V/AC220V	DC24V	DC24V
Control Mode:	Switch	Switch	DMX512	DMX512
IP Rating:	IP66	IP66	IP66	IP66
Working temperature:	-40~50°C	-40~50°C	-40~50°C	-40~50°C
Warrenty:	2years/ 20000 hours lifespan, maintaining freely forever except LED chip and driver.			

