



## ARRAN

### Application


Using thick imported die-casting aluminum, mainly used for building exterior walls, cylindrical lighting, outdoor landscape decoration, etc., surface and linear lighting, strengthen the outline of architectural , original design, for sketching exterior wall outline, perfect industrial design, multiple lighting distribution,suitable for different scenes, to create a good atmosphere. 5 degrees, 15 degrees, 65 degrees, 110 degrees for selecting.




5.4°




15°



65°



110°

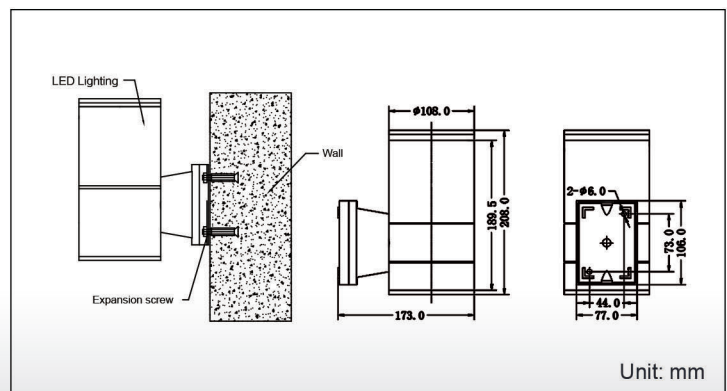


## Material


Die cast aluminum shell, surface coating colors: aluminum colour   
 Surface-mount, optical glass lens  
 Internal 24V driver

## Performance parameters


Color Temperature:	Warm white 3000K, Cool white 5000K	Single color: Red <span style="color: red;">■</span> Green <span style="color: green;">■</span> Blue <span style="color: blue;">■</span>	3000K/5000K dimmable
Control Model:	Switch	Switch	DMX512
LED:	CREE XP-G2/HXP35	CREE	CREE
Wattage:	3W/7.5W	3W	3W/7.5W
IP66:	IP66	IP66	IP66
Working Temperature:	-40~50°C	-40~50°C	-40~50°C
Input Voltage:	24V/100-270v	24V/100-270v	24V
Driver:	MEANWELL	MEANWELL	MEANWELL
Warranty:	2years/ 20000 hours lifespan, maintaining freely forever except LED chip and driver.		

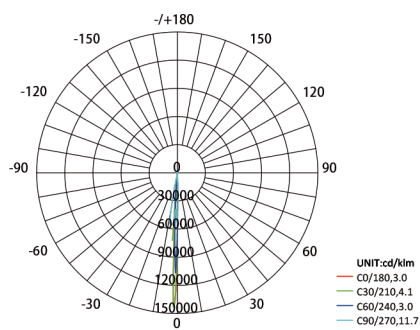

5.4°

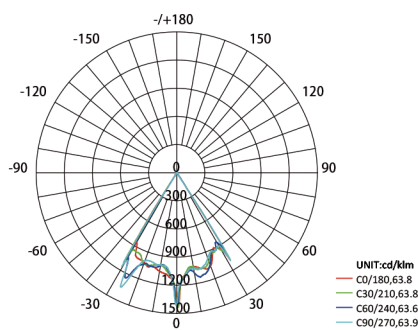

65°

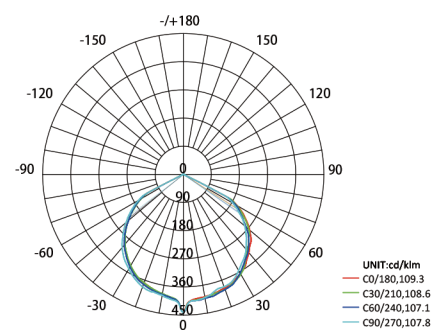

110°

