
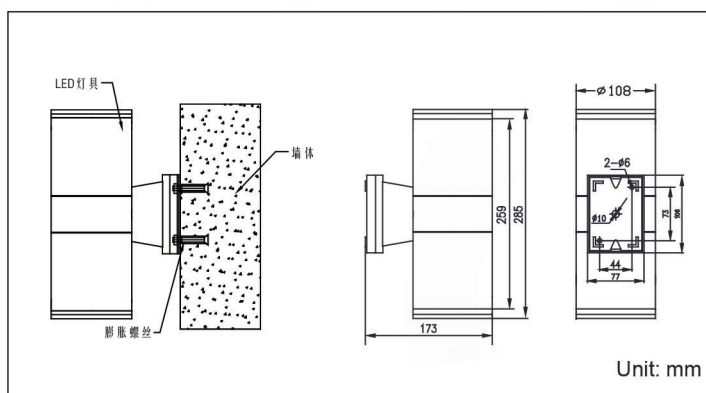
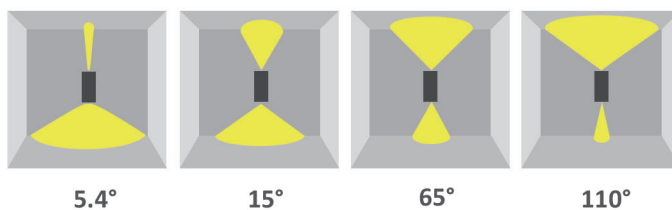



GRAFTON

Application

Using thick imported die-casting aluminum, mainly used for building exterior walls, cylindrical lighting, outdoor landscape decoration, etc., surface and linear lighting, strengthen the outline of architectural , original design, for sketching exterior wall outline, perfect industrial design, multiple lighting distribution,suitable for different scenes, to create a good atmosphere. 5 degrees, 15 degrees, 65 degrees, 110 degrees for selecting.

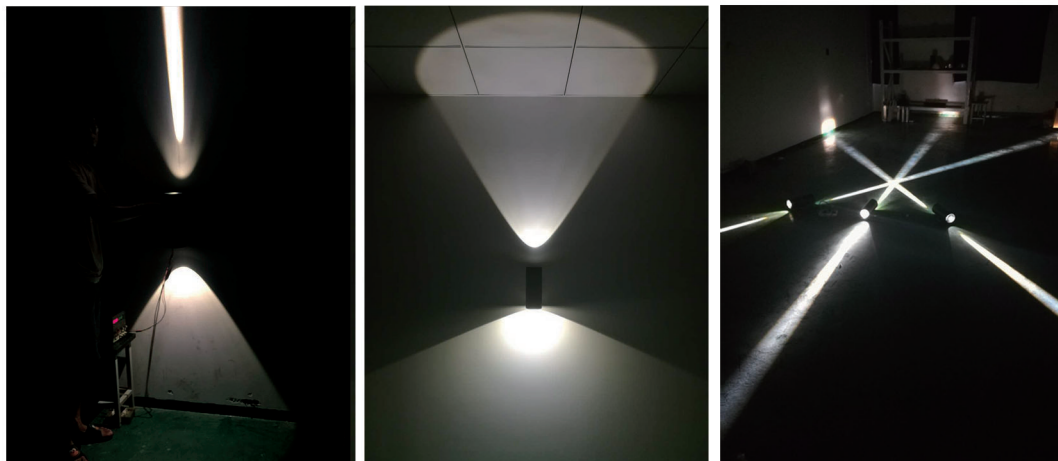

DEKO
LUCIE

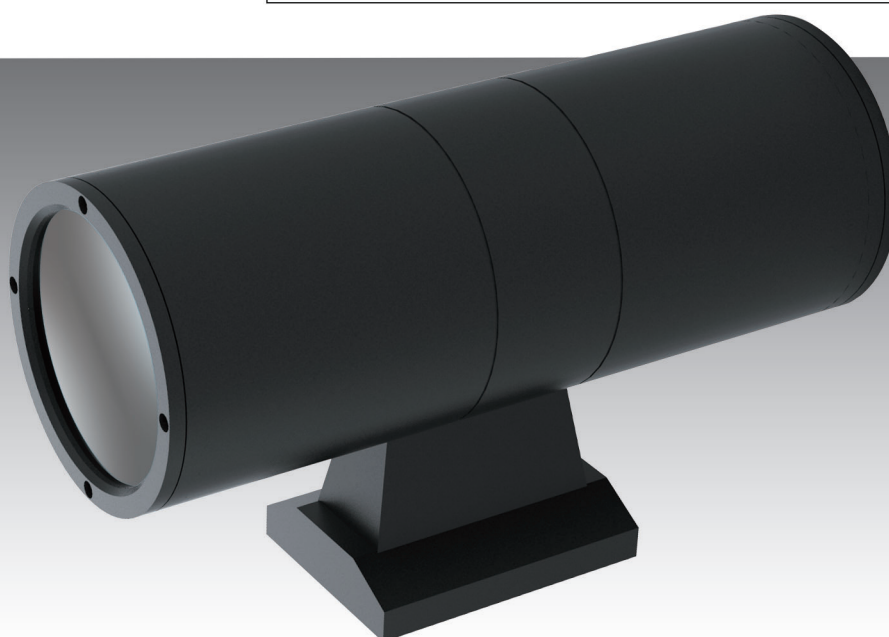

Material

Die cast aluminum shell, surface coating colors: black ■
Surface-mount, optical glass lens
Internal driver

Performance parameters

Color Temperature:	Warm white 3000K, Cool white 5000K	Single color: Red ■ Green ■ Blue ■	3000K/5000K Dimmable
Control Model:	Switch	Switch	DMX512
LED:	CREE XP-G2	CREE	CREE
Wattage:	6W	3W	6W
IP:	IP66	IP66	IP66
Working Temperature:	-40~50°C	-40~50°C	-40~50°C
Input Voltage:	100-240v	100-240v	24V
Driver:	MEANWELL	MEANWELL	DC
Angle:	5 degree, 15degree, 65 degree, 110degree assorting randomly		
Warranty:	2years/ 20000 hours lifespan, maintaining freely forever except LED chip and driver.		

