Hybrid


2tec2 high tech flooring


MADE IN BELGIUM

COMMERCIAL WOVEN VINYL FLOORING
FOR
WORKSPACES, HOSPITALITY,
HEALTHCARE, PUBLIC SPACES AND RETAIL

2TEC2.COM



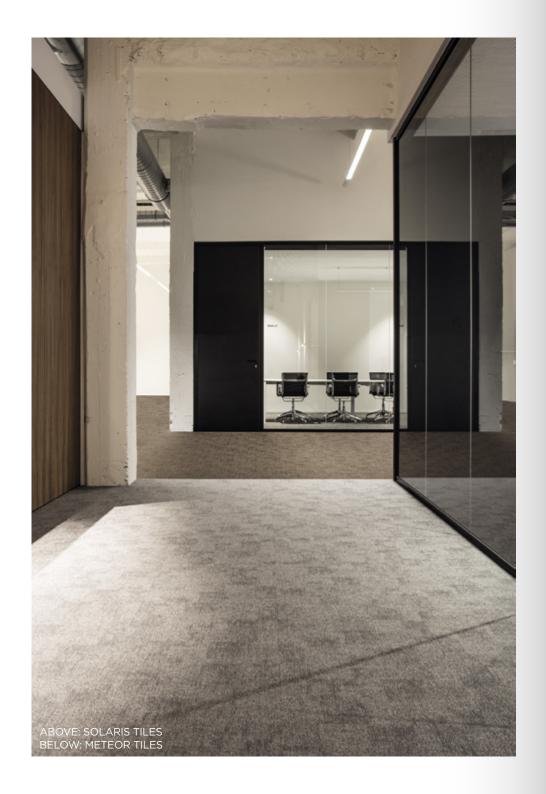


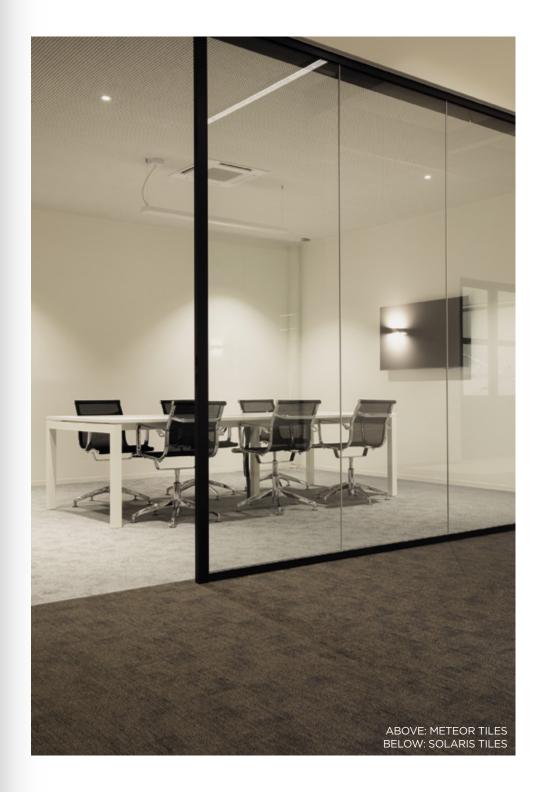









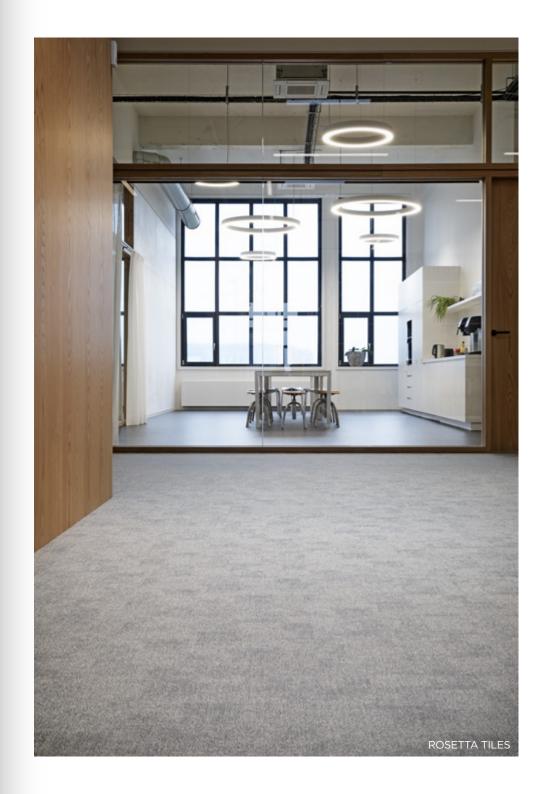




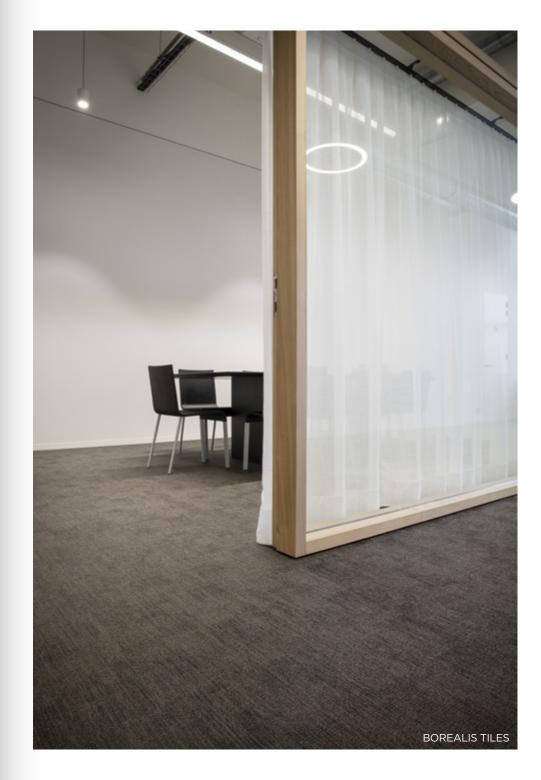





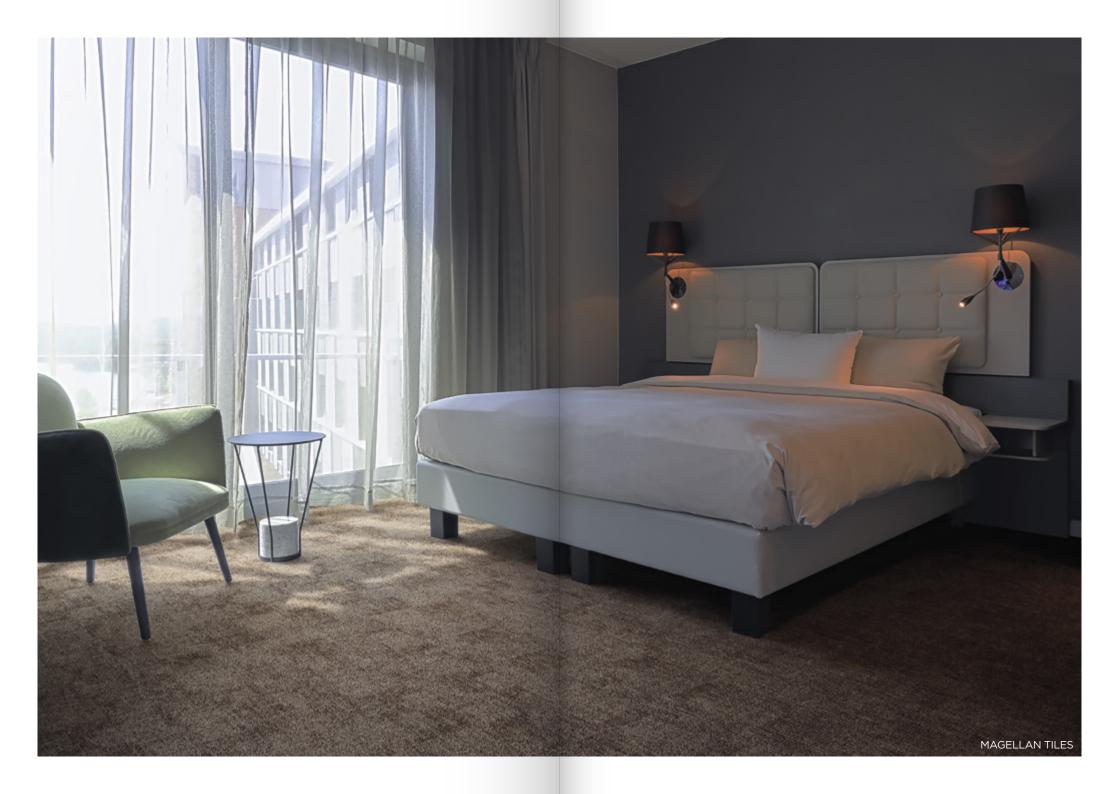

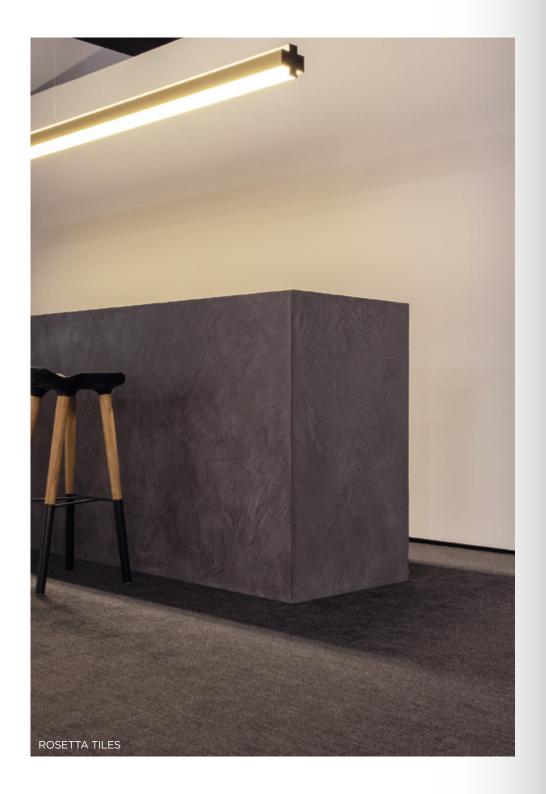




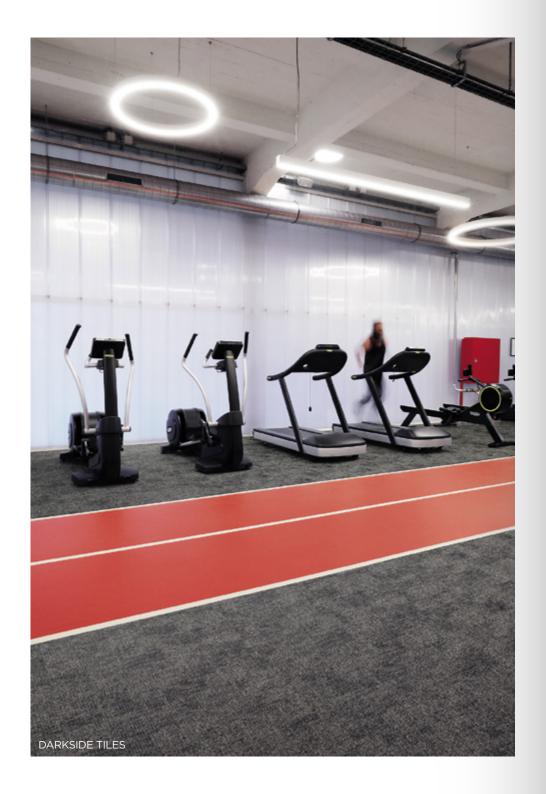


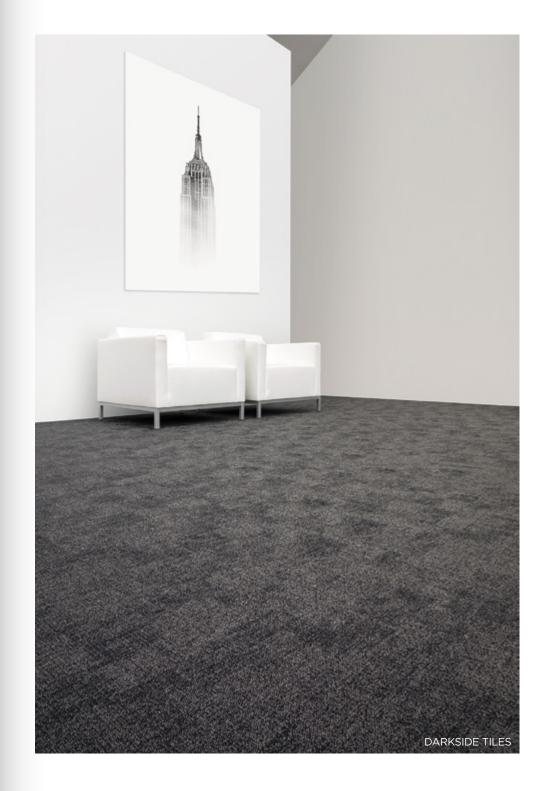







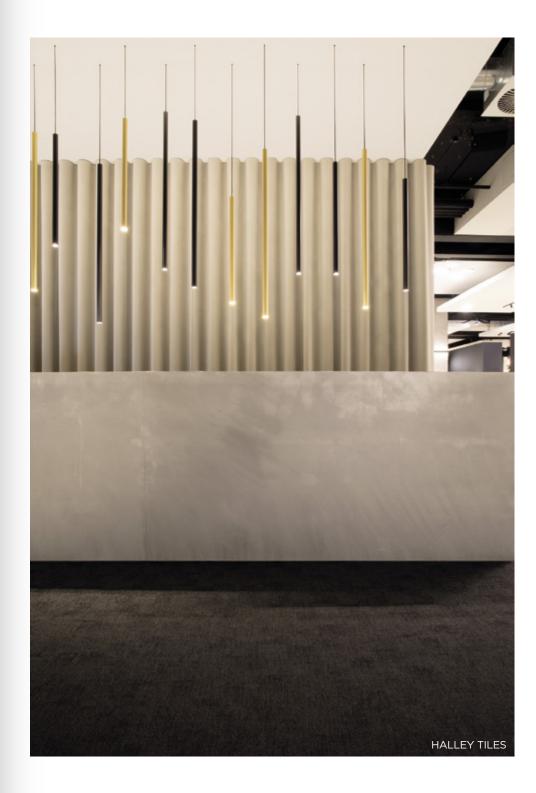

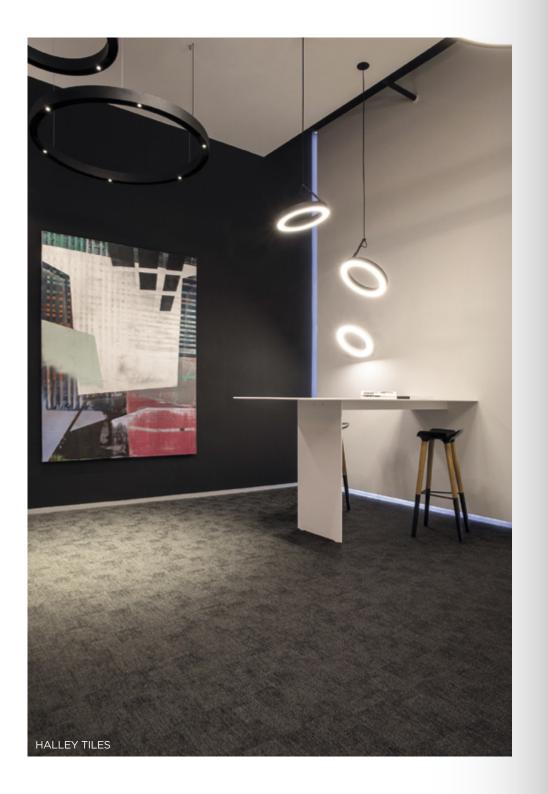

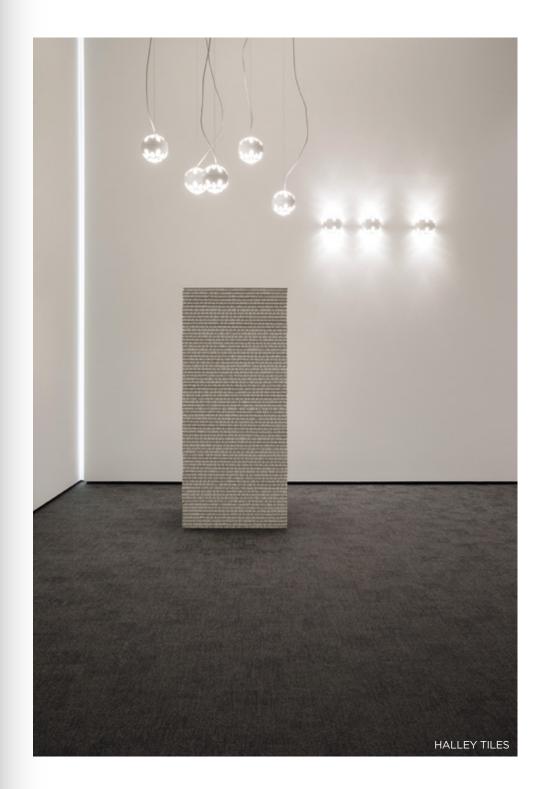

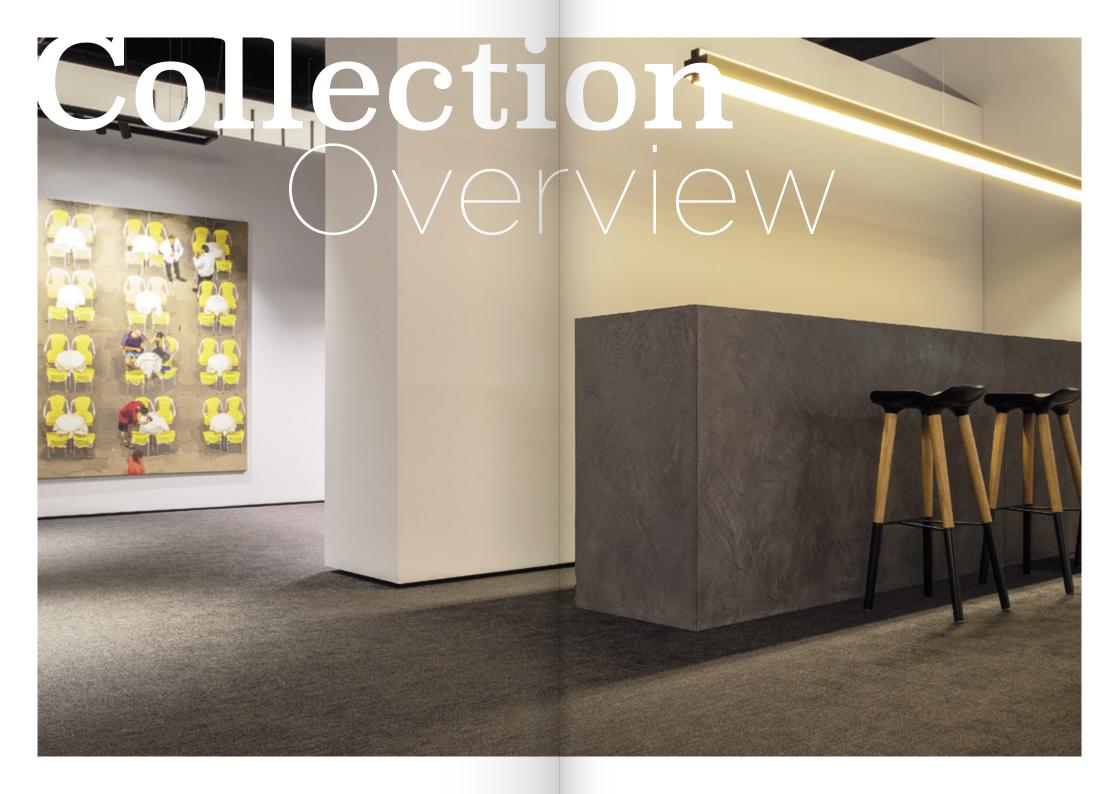











VISUAL APPEARANCE BASED ON INSTALLING DIRECTION



Helios





Stellar





Magellan

VISUAL APPEARANCE BASED ON INSTALLING DIRECTION





Stardust





Borealis





Solaris













VISUAL APPEARANCE BASED ON INSTALLING DIRECTION



Meteor





Celeste





Galena

VISUAL APPEARANCE BASED ON INSTALLING DIRECTION





Halley





Darkside





Rosetta

TECHNICAL INFO

	Warranty		10 years*
	Composition		83% vinyl 7% fiberglass 10% PET
	Backing		Vinyl + Felt
· ×	Total thickness	ISO 1765	5mm 0.20"
	Total weight	ISO 8543	3000 g/m² 88.5 oz/yd²
	Roll width	EN ISO 24341	ca. 200cm ca. 6'7"
<u></u>	Roll length	EN ISO 24341	ca. 30m 32.8 yd
	Tile size 16 pcs per box	EN 994	50cm x 50cm 19.69" x 19.69"
	Level of Use	EN 1307 ASTM D5252	Class 33 Heavy commercial use
	Foot traffic test	ASTM D6119-12	Heavy traffic
	Castor chair suitability	EN 985	Continuous use
	Reaction to fire	EN 13501-1	Bfl-s1
	Critical radiant flux	ASTM E648-15e1 NFPA	0,84 W/cm² Class I
	Smoke density	ASTM E622	< 300
F	Walking test	ISO 6356 AATCC 134-2006	< 2 kv Permanently antistatic
7	Light fastness	ISO 105-B02	≥7
	Slip resistance	EN 13893 ASTM C1028-07 DIN 51130 EM 13036-4	≥0,3 0,85 R9 65
	Impact sound reduction	ISO 10140	19dB
	Acoustical absorption	ISO 354	aw = 0,15
	Walking noise reduction	EPLF 021029-3	SL70
	Dimensional stability	EN 986 ISO 2551	Meets the requirements
	Thermal resistance	ISO 8302	Suitable for underfloor heating
CE	CE Certificate	EN 14041	0493-CPR-0151



Recycled Content	10%	
Reach	Compliant	
LEED v4	Compliant (LEED Contributing Product)	
BREEAM International	Compliant	
BREEAM® NOR	Pass	
French VOC Regulation	A+ Certified	
AGBB/ABG	Pass	
Belgian VOC Regulation	Pass	
Indoor Air Comfort Gold	Pass	
Blue Agel (RAL VZ120)	Pass	
EN 717-1	E1	
Plasticizer Content	Phthalate Free**	


















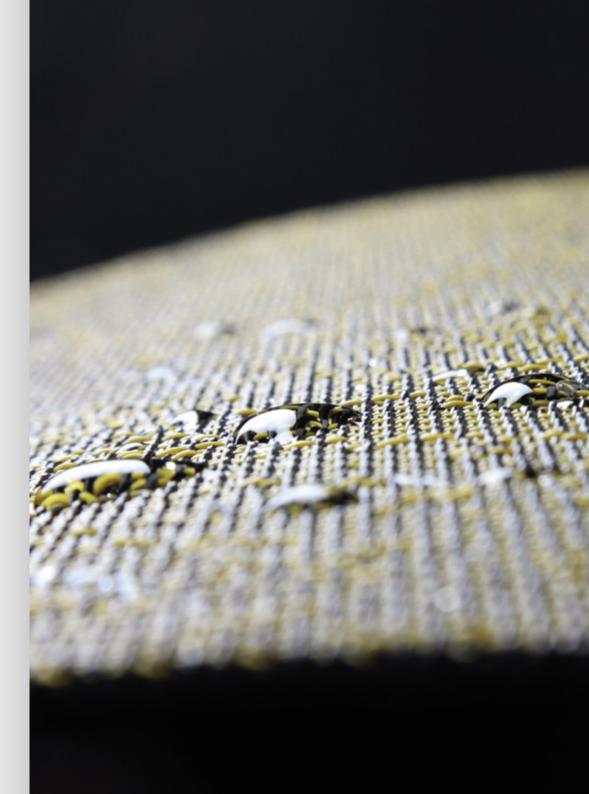

2TEC2 HEADQUARTERS

284, CHAUSSÉE D'AELBEKE 7700 MOUSCRON, BELGIUM T +32 (0)56 85 47 47 INFO@2TEC2.COM

2TEC2.COM

